

# **User Manual**

## Direct-Call Door Station








<u>www.</u>opizcn. com **OPIZ ELECTRONICS CO.,LTD.** 




## . VIEW

#### 1. Front view



#### 2. Rear view



- LOCK+ Connects with lock. This line can be signal line for unlocking if it is not used for the lock. Available for high level (12V)
- LOCK- Connects with lock. This line can be common line for unlocking if it is not used for the lock.
- S Video line and power supply for indoor phone. Connects with indoor phone No. 1 line
- Video line, connects with indoor phone No.2 line
- Common line, connects with indoor phone No.3 line Signal line for unlocking, connects with indoor phone No.4 line
- Connects with power + +
- Connect with power -
- Calling line for indoor phone, connects with B line

## II. FUNCTIONS

- 1. Two way communication
- 2. Unlock
- 3. One house one button
- 4. Back light for keyboard

## III. OPERATION

Calling: press "Call" button to call the indoor phone and talk with the householder of the indoor phone. The householder can unlock the door by pressing "Unlock" button


## IV. SPECIFICATIONS

Temperature: -40 °C ~ 70 °C Relative humidity: 45% ~ 95%

Atmospheric pressure: 86Kpa ~108Kpa

Fire endurance rating IP33 Working voltage: DC12V Standby current: 10mA Working current: 20m Dimension:332\*128\*48mm Install dimension: 31\*118\*37mm Installation: Wall mounted Net weight: 790g

## V. PROGRAMMING

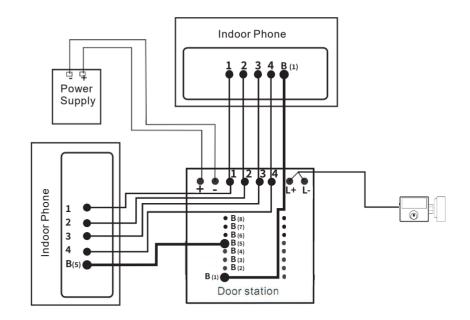

- 1 -- 2 -