


## User Manual Video Door Phone

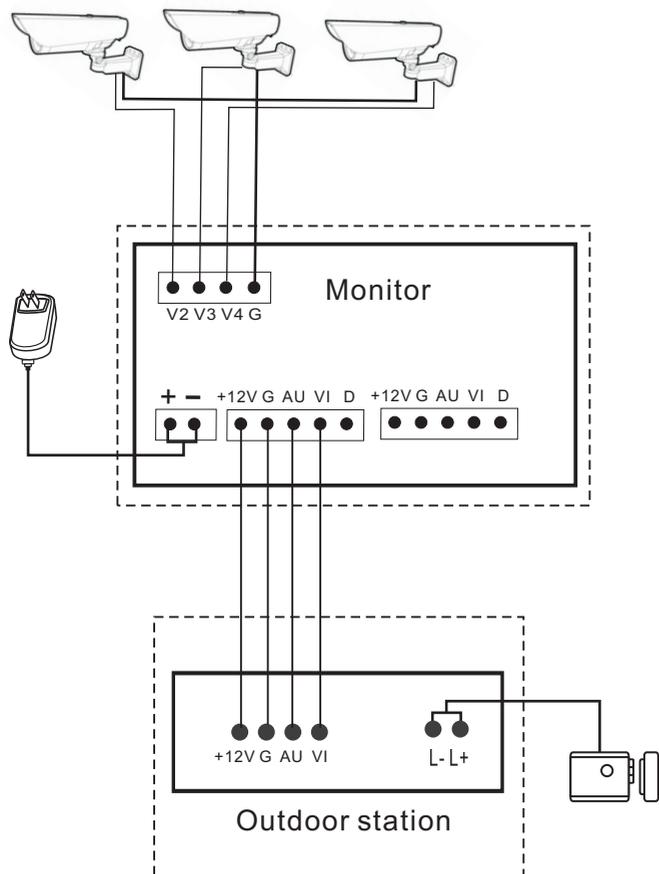

OP-D6A8M4


[www.opizcn.com](http://www.opizcn.com)  
OPIZ ELECTRONICS CO.,LTD.

**OPIZ** tip

- Thank you for your kindly purchasing our product.
- Please read this user manual carefully before using the product and following instructions exactly on how to install and use the product.


## I. VIEW

### 1. Front view

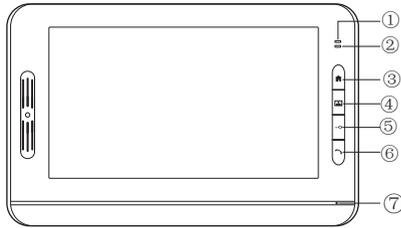


- ① Power indicator
- ② Intercom indicator
- ③ Record
- ④ Monitor
- ⑤ Unlock
- ⑥ Intercom
- ⑦ MIC

### 2. Side view




- ① Multi-functions button
- ② Adjust volume of ringtone
- ③ Adjust volume of intercom

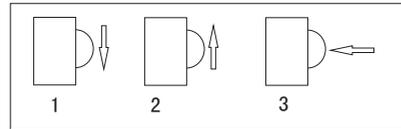

Instruction of multi-functions button

1. Down/reduce in menu states  
Wake up/off screen in main menu/standby
2. Up/increase in menu states  
Into photo/video record in standby states
3. Menu button in standby states  
confirm button in menu states

### 3. Rear view

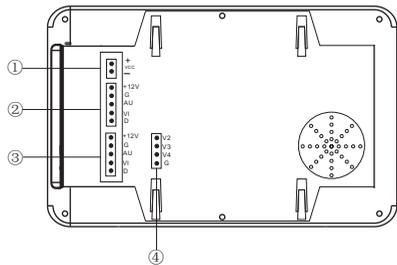

- ① Connect with power adapter
- ② Connect with monitor
- ③ Connect with outdoor station
- ④ Connect with camera

- + Power "+"
- Power "-"
- 12V Connect with power supply wire  
of outdoor station
- G Common wire
- AU Intercom & unlock line
- Vi Video line
- D Connect with other monitor

## II. FUNCTIONS

1. Intercom
2. Unlock
3. Monitor
4. Auto take photo
5. Auto video record
6. Auto shut down
7. Time and date display
8. 12 ringtones
9. Intercom between monitors
10. Adjust image
11. Adjust ring tones volume
12. Adjust intercom volume
13. Can connect 3 CCTV

## III. OPERATION

1. Intercom: press "Intercom" button to communicate with visitor when monitor rings. In standby states, press "monitor" and "Intercom" button can also communicate with outdoor station.
2. Intercom between monitors: press "Intercom" button to communicate with others monitors.
3. Unlock: press "unlock" button to open the door in intercom states or monitor states.
4. Monitor: In standby, press "Monitor" button to view outside, press again to turn to another camera channel, and then stop.
5. Check photos/video record: Device can setting auto-take photo or video. When set auto-take photo below operation will into photo record directly. Or set auto-take video will into video record directly.
  - A. Press the "Record" button into record, out off record menu by pressing "Record" button again.
  - B. Move multi-functions button up into record, press "Record" button to out off record menu.
 Tip: In setting menu  is record file include video and photo file.
6. Auto-take photo/video setting: (for setting auto-take photo or auto-video as calling) Press multi-functions button in for coming to setting menu, choose photo/video setting icon , move multi-functions button down to choose photo/video and press confirm button again to confirm setting.
7. Choose ringtones: choose ringtone icon  and press menu button, then move up or down to choose ringtones.
8. Adjust volume of ringtones: please adjust button ② at side.
9. Adjust volume of intercom: please adjust button ③ at side.
10. Time setting: choose time icon  and press menu button, then move up or down to set up time.
11. Date setting: choose date icon  and press menu button, then move up or down to set up date.
12. Adjust image: choose related icon and press menu button to adjust  brightness,  contrast,  color

## IV. SPECIFICATIONS

Temperature: -25℃~55℃  
 Relative humidity: 45%-95%  
 Atmospheric pressure: 86Kpa~108Kpa  
 Fire endurance rating: IP33  
 Standby current: 130mA

Working voltage: DC13.5V  
 Working current: 450mA  
 Dimension: 205\*125\*25mm  
 Installation: wall mounted  
 N.W.: 330g