

Science & Technology protect your comfort life.

OPIZ

User Manual

Direct-Call Door Station

OPIZ



OP — D7D9


www.opizcn.com
OPIZ ELECTRONICS CO.,LTD.

OPIZ tip

- Thank you for your kindly purchasing our product.
- Please carefully read this user manual before using the product and follow instructions exactly on how to install and use the product.


I. VIEW

1. Front view



- ① Camera
- ② Speaker
- ③ Call button 1
- ④ Call button 2
- ⑤ Call button 3
- ⑥ Logo
- ⑦ Name card
- ⑧ MIC

2. Rear view

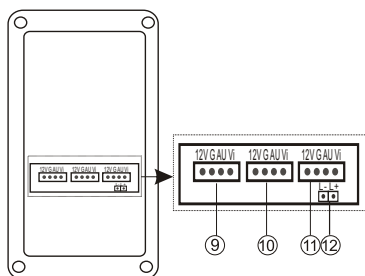

- ⑨ Terminals 1 connect with call button 1
- ⑩ Terminals 2 connect with call button 2
- ⑪ Terminals 3 connect with call button 3
- ⑫ Connect with lock, high level is effective

- Vi Video line connect with indoor phone Vi
- AU AU talking, calling and unlock line, connect with indoor phone AU
- G A common line, connect with indoor phone G
- 12V Power supply of door unit, connect with indoor phone 12V
- L+ Connects with lock. This line can be the signal line if it's not used for the lock, high level is for unlocking.
- L- Connect with lock. This line can be the common line if it's not used for the lock.

II. FUNCTIONS

1. Two way communication
2. Unlock
3. One button call one individual room number
4. Transmit video image
5. Power indicator
6. IR camera

III. OPERATION

Calling: press "Call" button to call the indoor phone and talk with the householder of the indoor phone. The householder can unlock the door by pressing "Unlock" button

IV. SPECIFICATIONS

Temperature: -40 °C ~ 70 °C
 Relative humidity: 45% ~ 95%
 Atmospheric pressure: 86Kpa ~ 108Kpa
 Fire endurance rating: IP33
 Working voltage: DC12V
 Static current: 0.07mA
 Working current: 166mA
 Camera: Color 420L; B/W 480L
 Dimension: 180*90*35mm
 Installation: 70*70*8mm
 Net weight: 440g

V. PROGRAMMING

